WWW.T2TEK.NET
info@t2tek.net p.(305)602.2237

FOE-D96

Fiber Optic Splice Dome Closure 96 CT



Pic#1: Top View

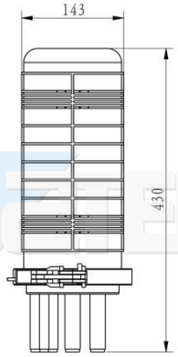

Pic#2: Front View



Pic#3: Bottom View

Pic#4: Top View

Pic#5: Front View

Description

FOE-D96 dome enclosure provides space and protection to the fiber optic cable splicing and joint.

- Easy to assemble
- Protection level reaches IP 68
- High Quality plastic body material ensure the durability

Model No.	SC-D096-03	**Color**	Black
Capacity	96 cores	**Protection Level**	IP68
Material	PC, PC+ABS,PP	**Inlet/Outlet**	1+4
Dimension (MM)	430*Φ143	**Sealing Method for Inlets**	Heat Shrinkable
Inlet Cable Port	Φ11-Φ28	**Outlet Cable Port**	Φ8-Φ21

Features

- The body is made of high-quality engineering plastic with good strength.
- With good waterproof design, the fiber optical splice closure can be applied into underground and aerial.
- Be equipped with 4 splice trays (each capacity is 24 cores).
- Excellent fiber routing design ensures the radius curvature of the fiber and enough fiber storage space.

FOE-D96

@t2tek